

Feeding Process

ALM-200 Feeding System composed by 2 Hoppers + 2 Aluminum Rollers + 2 Single Shovels



Automatic feeding system for all types of cork stoppers (natural, (micro)agglomerate, synthetics, etc.) suitable to feed body rectifying machines.



Source

Power Supply
415/220V (3Ph+N) 50Hz



Power

Installed Power 1.0 kW



Compressed Air

Compressed Air Supply
NA



Noise

< 70 dB




Cadence

Nominal Cadence
15 000 corks/hour

General Features

- ✓ Shovels dimensions adjusted to the client's needs;
- ✓ Hopper can be manufactured with the dimensions and materials specified by the customer;
- ✓ Safety protections prepared with flanges for cork dust collection;
- ✓ Almost non-existent maintenance.

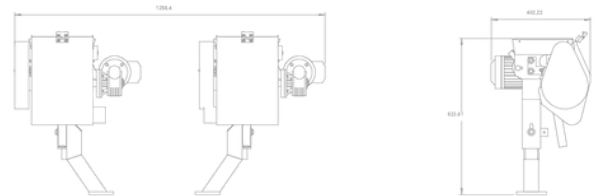

Dimensions

H 623,61 mm x D 402,22 mm x W 1258,4 mm



www.azevedosindustria.com

Lourosa, Portugal

+351 22 747 15 70 (Call cost for national fixed network) ▪ geral@azevedosindustria.com

